

LABASTILLE METAL. EVOLVED.




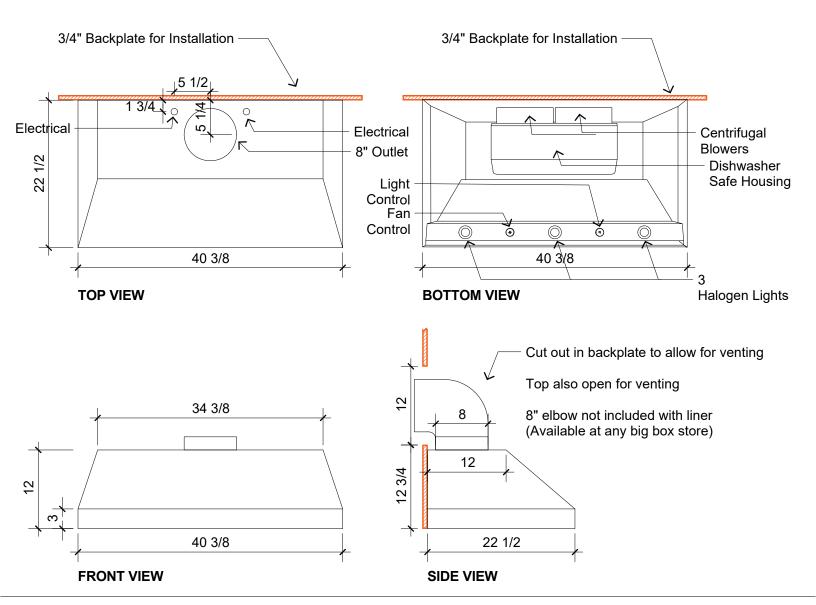


Specifications:

- 1. 900 CFM Equivalent Liner; 6.5 Sones
- 2. Recommended bottom of liner to be mounted 27"-30" above range
- 3. Liner width should be equal to or 4" greater than width of cooktop
- 4. Duct can be vented through wall or through top
- 5. Bottom of hood will be closed around outside of liner
- 6. Buyer responsible for ducting & connections from top of liner to exterior
- Typically requires standard #14 or greater 120V dedicated circuit suggested: Grounded Neutral (White), Hot (Black), & Ground (Green). Unit pulls 4 Amps Max. Be sure to follow local building codes.
- 8. Liner typically connected by licensed electrician

LABASTILLE METAL. EVOLVED



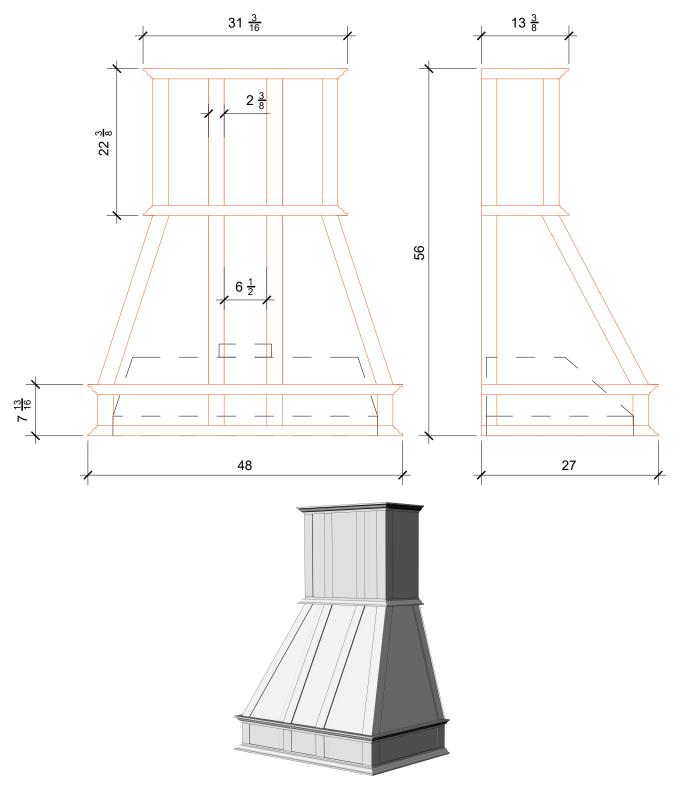

Rendering does not depict finish.